

STATEMENT OF WORK

The U.S. Embassy in Haiti requires the service of a Contractor to install new canopies in different places at the New Embassy and Consulate (NEC) compound as well as Reyes, which is located across the street from the consulate. In addition to the installation of the new canopies, the service is required for the repair of existing ones which structures are weakening. The canopies are needed to provide sunshades to the specific cars stationed at the New Embassy and Consulate Compound (NEC) and Reyes.

Description

Canopies are defined as freestanding structures that have posts supporting their fabric roof. It is required that the contractor follows the requirements listed in this Statement of Work.

1. The contractor shall provide all the materials, equipment, and labor, among others, needed for the installation and the repair the canopies.
2. All expenses towards mobilization at site and demobilization including bringing in equipment, workforce, and materials, dismantling the damaged poles, clearing the site etc... will be the responsibility of the contractor.
3. The Contractor will take his own measurements of the parking for bidding purposes
4. The contractor shall ensure that the canopies are resistant to storms and other disasters that might affect the safety of vehicles and other items surrounding them.
5. The structure must be done with, preferably, 2"-galvanized pipes. The poles must be resistant enough to avoid any possibility for bending.
6. The metallic structure must be painted.
7. The current poles that are failing must be repaired or replaced.
8. It is recommended that the Contractor tack weld the bolts to increase more stiffness of the post structure.
9. The fabric shall cover the whole section of each car shade and mount on top of car shade cantilever metal structure.
10. The fabric shall be uniformed, which means that the current fabric must be changed to the chosen one specified in this SOW.
11. The work is expected to be completed in 20 days.

The contractor is required to provide canopies for these different spaces

For the New Embassy and Consulate Compound (NEC), the request

1. 4 parking spaces (See Image 1)
 - a. No existing structure/canopy
 - b. Add canopy
2. 4 parking spaces (including 1 accessible parking space) (See Image 2)
 - a. No existing structure/canopy
 - b. Add canopy
3. 6 parking spaces (See Image 3)
 - a. Repair existing structure/canopy
 - b. Add Canopy
4. 6 parking spaces (See Image 4)
 - a. Repair of existing structure and eliminate signs of corrosion
 - b. Additional structure for canopy
5. 3 parking spaces (See Image 5)
 - a. Repair existing structure
 - b. Change the fabric
6. 6 parking spaces (See Image 6)

- a. Repair existing structure
 - b. Change fabric
- 7. 3 parking spaces (See Image 7)
 - a. Replace existing tent with a one more appropriate for an ambulance
- 8. 12 parking spaces (See Image 8)
 - a. Repair existing tent
 - b. Add tent
- 9. 2 parking spaces (See Image 9: A – part in blue)
 - a. Add tent for 2 parking space
- 10. 20 parking spaces (See Image 9: B – part in blue)
 - a. Add tent for 20 parking spaces

For the Reyes parking lot, the contractor shall provide a canopy for 17 parking spaces (See Image 11 – part in blue).

IMAGES



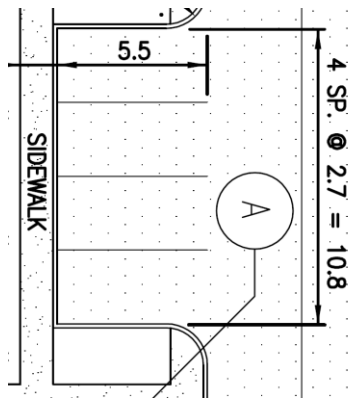



Image 1: 4 parking spaces (NEC)

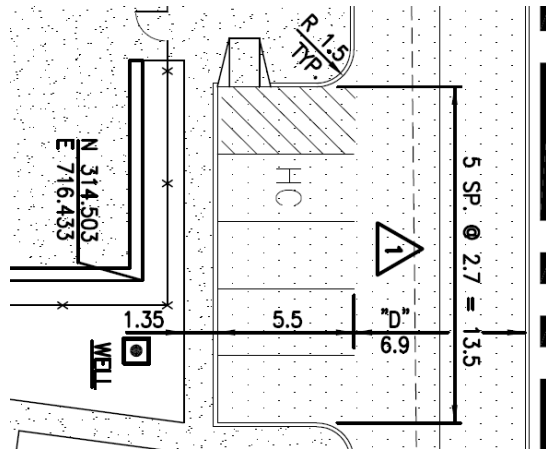


See Image 2: 4 parking spaces (NEC)

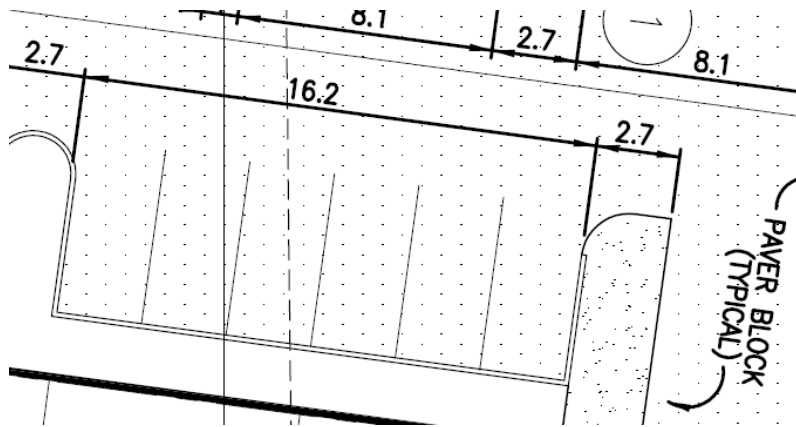

See Image 3: 4 parking spaces

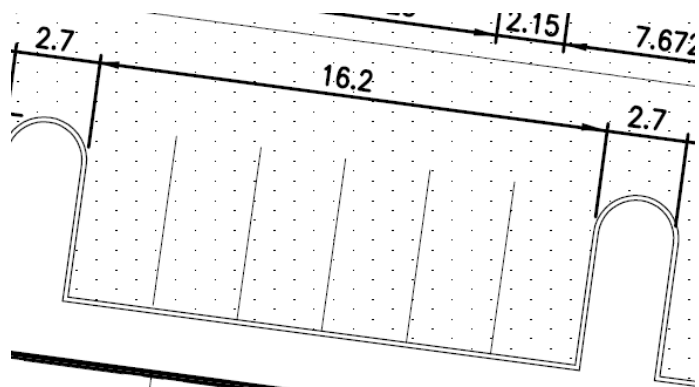


See Image 4: 6 parking spaces (NEC)

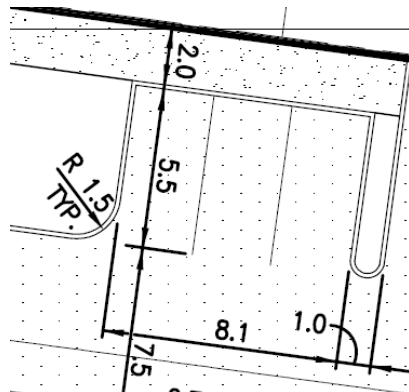


See Image 5: 3 parking spaces (NEC)




See Image 6: 6 parking spaces (NEC)

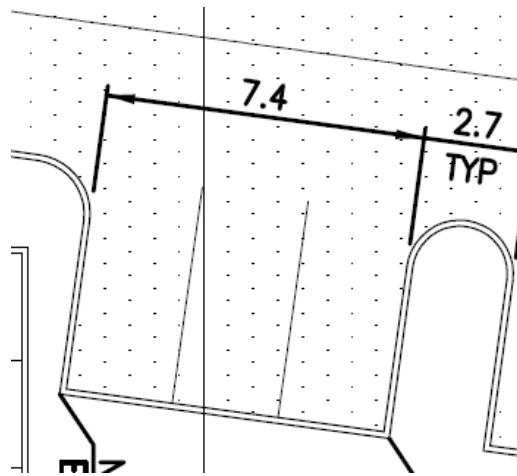


See Image 7: 3 parking spaces (NEC)

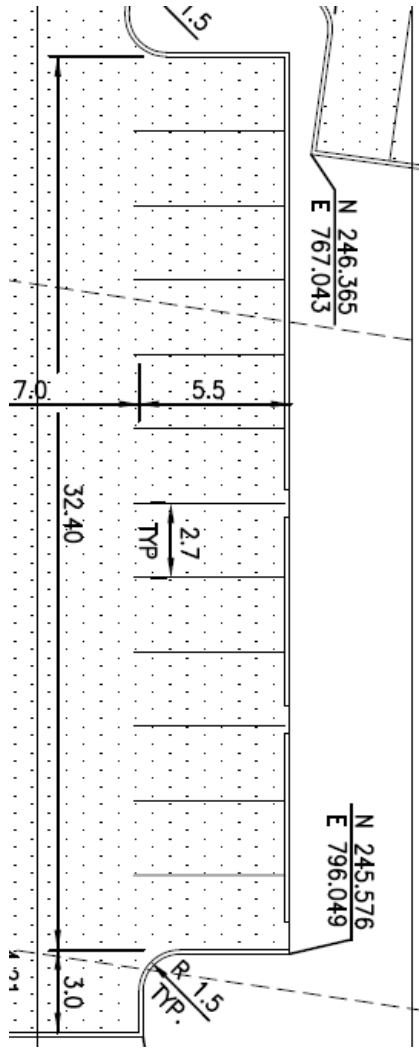

See Image 8: 12 parking spaces (NEC)

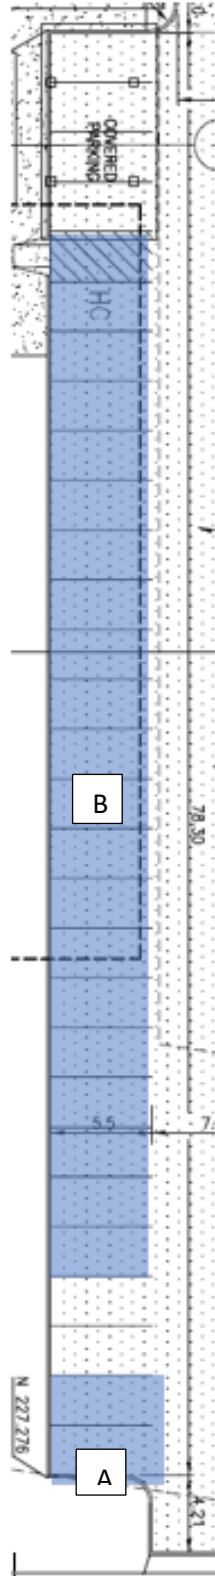

See Image 9:A - 2 parking spaces
 B - 20 parking spaces
 (NEC)

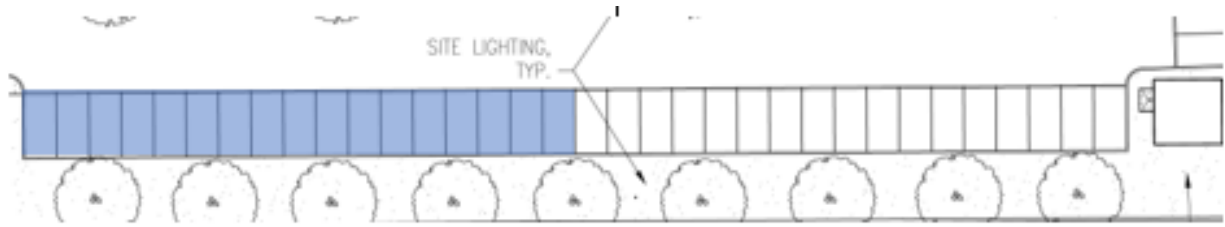

See Image 10:17 parking spaces (Reyes)